


# TECHNICAL SPECIFICATIONS C6 CONCRETE CRUSHER

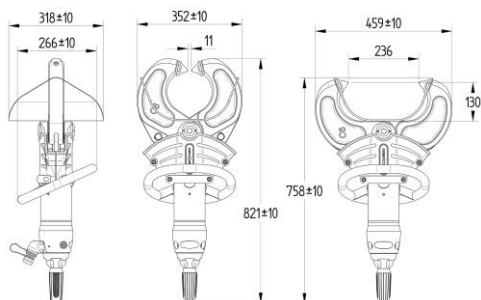

## C6 CONCRETE CRUSHER

NEO1 

HP/FF 

Nominal pressure	Optimized 350 bar	Optimized 350 bar
Tailhose safety factor	-	8:1 (2,800 bar)
Dimensions (L x W x H)	821 x 352 x 318 mm	821 x 352 x 318 mm
Operational weight	19.1 kg	20.4 kg
Max. crushing opening / material thickness	236 mm	236 mm
Reach	130 mm	130 mm
Max. crushing force	89.9 kN / 9.2 ton	89.9 kN / 9.2 ton
Min. crushing force	74.1 kN / 7.6 ton	74.1 kN / 7.6 ton
EN 13204	Fullfills safety requirements	Fullfills safety requirements
NFPA 1936	Fullfills design requirements	Fullfills design requirements

## ACCESSORIES

Art. Nr.

LED light add-on

9500.1000



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.

RESQTEC Zumro B.V.

Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002

E info@resqtec.com

F +31 (0)252 411794

W www.resqtec.com

**RESQTEC**®